

AMS 5 STAGE Decontamination Trailer


Water is heated via a gas boiler, which is mounted internally in a housing located centrally on the front bulkhead and connected to a flue. The boiler operates at 11 litres per minute and has an electronic ignition.

The decontamination trailer is divided into three compartments by the fitting of partitions. A bench seat and 900mm electric tube heater are provided in each end of the unit. In the clean end there are also eight coat hooks and eight lockers together with a fixed mirror. The lockers each have a socket to charge respirators.

Decontamination Trailer Features

- Five Stage decontamination unit (2 showers)
- Gas hot water systems fitted
- Honda GSX200 RCD protected generator
- In built DOP Tested Negative Pressure Unit
- In built water tank with gas hot water system
- Waste pump out through a 25 micron and 5 micron sediment filter
- Self closing door

Trailer is completely self contained unit with RCD protected generator built in and gas bottle supplied for heating of water.

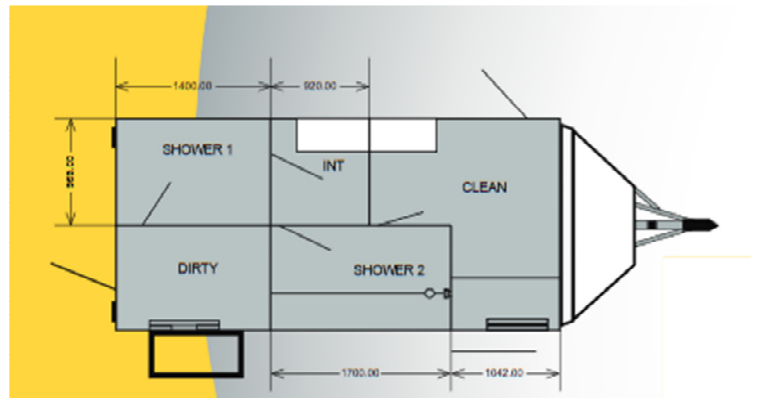

Recommended Spares



- 25 Micron Sediment Filters \$10.95inc each – Requires 1 per trailer

- 5 Micron Sediment Filters \$10.95inc each – Requires 1 per trailer



- Pleat Filter for Negative Pressure Unit \$12.10inc each – Requires 1 Per trailer